
# CYLINDRA WALL RANGE HOOD



LUXURIOUS STAINLESS WALL CYLINDER HOOD. The Cylindra wall hood features a stainless steel cylinder with state of the art LED touch controls and perimetric suction to decrease sound and improve efficiency. Use the stainless cylinder alone or add more style with the optional glass kit.

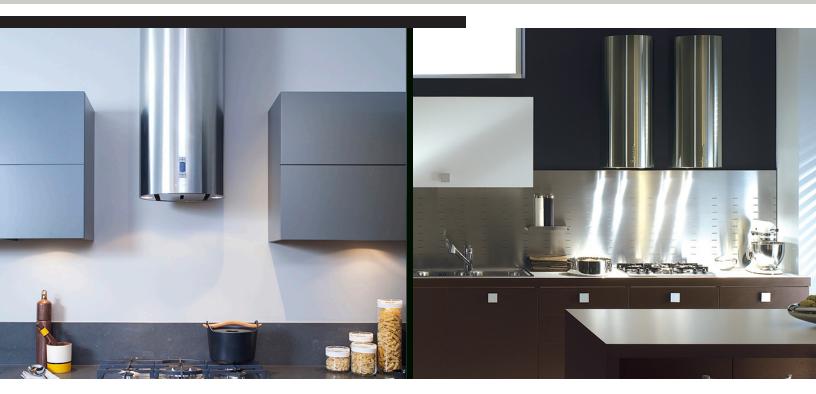

## **AVAILABLE MODELS**

Model #	Size / Color	Motor Class (CFM)	Sound Levels (sones)
CYLN15SS	15" Stainless	600 CFM	1.5 - 6.5

# **KEY FEATURES**



LED Electronic Controls Backlit electronic controls with a White LED light to indicate the current speed and two level lighting



## **Perimeter Aspiration**

Air is forced through narrow slots around the perimeter of the center panel greatly improving contaminant extraction.



Pro Motor The motor in this hood is surrounded in metal with all metal impellers for top performance

# CYLINDRA WALL RANGE HOOD

DIMENSIONS

FABER

MATTERS

AIR

# **SPECIFICATIONS**

min. / max. ceiling height	8' (@ 24' off the stove recommended)		
convertible to ductless / recirculating	yes – kit sold separately		
controls	4 speed LED digital control		
lighting	2 x 20 (w) halogen - dimmer		
ducting top	6″ round		
grease filters	dishwasher safe mesh		
pro motor w/ metal impellers	yes		
perimetric suction system/ silent kit	yes		
10 minute intensive speed	yes		
24 hour anti-pollution mode	yes		
30 minute auto shut off	yes		
grease filter wash indicator	yes		
AC Power	490 watts / 4.1 amps		

## PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	350	450	560
Sones	1.5	2.5	3.5	6.5

# ACCESSORIES

#### # CFMRED -CFM Reducer Kit\*

For use in make up air areas where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300.

## # CFMRED2

#### **CFM Reducer Kit\***

For use in make up air environments where an under 400 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm from 400 to under.

### # FILTER2 -Charcoal Filter Kit

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months.

## # GLSCYLN Glass Kit (36" x 20")

Flat glass "canopy" attaches to the bottom of the stainless steel cylinder to increase capture area and add design and flail.

# MUDAMPER6 / MUDAMPER8


## Universal Make-Up Air Damper

Satisfies make-up air requirements, this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory.

#### # REMCTRL -Remote Control

Control all features of the hood from the convenience of a wireless remote control.



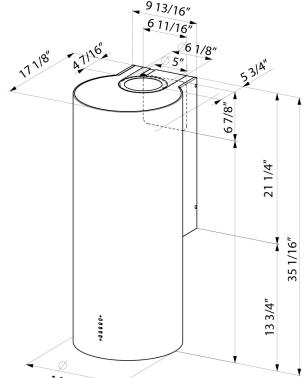

14 9/16"

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. \* Check local make up air codes for guidelines.

