

The Tratto features a streamlined curved glass canopy making the range hood a stunning alternative in canopy ventilation. With advanced LED controls and luxury features, the Tratto delivers.


Model #	Size Color	Performance Range	Sound Levels
TRAT ₃ 6SS	36 Stainless	160 - 600 CFM	3.5 - 6.5 sones



Feature Chart				
Min. / Max. Ceiling Height	7' 4 3/8" - 8' 9 3/8"			
Canopy Depth / Height	19" D / 2 " H			
High Ceiling Kit	Yes - up to 10' 8 1/4"			
Convertible to Ductless / Recirculating	Yes - ductless kit needed			
Controls	3 speed LED digital control			
Lighting	2 X 20 (W) Halogen + Dimmer			
Ducting Top	6" Round			
Grease Filters	dishwasher safe baffle filters			
Easy Cube Mounting	Yes			
30 minute auto shut off	Yes			
Silent Kit / 10 Minute Intensive Speed	Yes			
AC Input / AC Power	120 V - 60 hz / Max 370 W at 3.1 A			
Annual Electricty Costs	\$6.17 / Year *			

* Note – ran 30 minutes a day on low speed with the lights on, 365 days, using the North American average of 12.2 cents per kWh. p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

<u>Dimensional Diagrams</u> (see installation instructions for more information)

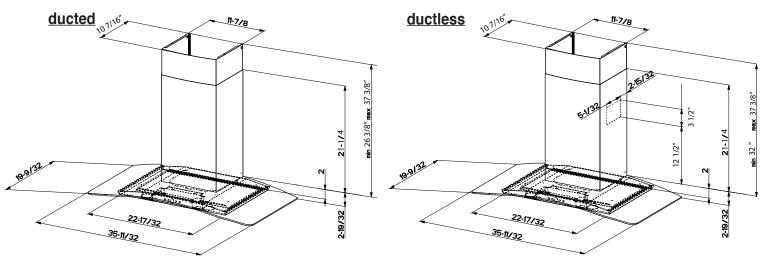

min & max ceiling height examples x = range hood height above cook top					
ducted		<u>ductless</u>			
<u>x = 24"</u>	<u>x = 30"</u>	<u>x = 24"</u>	<u>x = 30"</u>		
min	<u>min</u>	<u>min</u>	<u>min</u>		
7' 4 3/8"	7' 10 3/8"	7' 9 1/4"	8' 3 1/4"		
max	max	<u>max</u>	max		
8' 3 3/8"	8'93/8"	8' 3 3/8"	8' 9 3/8"		

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceiling installations, the High Ceiling Chimney Kit includes a new 39" upper chimney which would replace the 16 1/8" upper chimney that came with the hood.

ACCESSORIES					
High Ceiling Chimney Kit # HIGHTRAT One 39" upper chimney to replace 16 1/8" upper chimney that came with hood		CFM Reducer Kit #CFMRED For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300			
Ductless Conversion Kit # DUCTTRAT Includes: • Lower Chimney with holes for ducting • Ductless Diverter Assembly • Vent Grates • Charcoal Filter		Replacement Charcoal Filter # FILTER2 For ductless installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen.			



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.

Ró